

MicroPOS DS-2DBT - linija 1D/2D bežičnih, bluetooth bar kod čitača prikladna za potrebe aplikacija na prodajnim mjestima, trgovinama i skladištima.

DS-2DBT

1D/2D bežični, bluetooth bar kod čitač

- Procesor 32-bit visokih performansi
- Rezolucija piksela 640*480 30 FPS
- Podržava bar kod 1D/2D na papiru i zaslonu
- Ručni, automatski i kontinuirani način rada
- Trenutna predaja podataka, popis stanja (van mreže)
- Komunikacija Bluetooth, 2.4GHz RF
- Domet prijena: Bluetooth 50 m, RF 100 m
- Baterija 2200 mAh, Memorija 8K bar kodova (≤128 znakova)
- Žično, bežično, Bluetooth, postolje i nosač izborno

MicroPOS




Primjena:



Logistika



Skladište

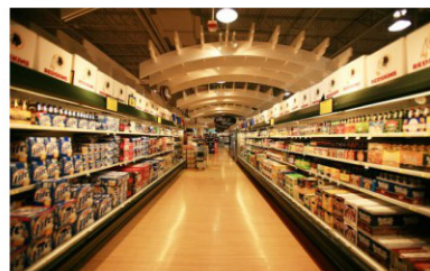

Supermarket

Tehnička specifikacija:

MICROPOS 1D2D DS-2DBT - PARAMETRI

Performanse za očitavanje	Senzor slike	CMOS 30 fps
	Izvor svjetlosti	617nm, vidljivi crveni LED, bijeli LED
	CPU	1 GHz
	Rezolucija	300 tisuća 640*480 pixel Podržava bar kod na papiru i zaslonu
	Mogućnost dekodiranja	2D: QR, PDF417, Data Matrix (obični i obrnuti) Aztec Maxi code itd. 1D: UPC-A, UPC-E, EAN-8, EAN-13, Code 128, Code 39, Code 93, Code 11, Interleaved 2of 5, industrial 2 of 5, Matrix 2 of 5, Standard 2 of 5, Coda bar, MSI Plessey, GS1, itd. sve obični 1D
	Preciznost	5 mil
	Izvor svjetla	617 nm vidljivo crveno LED, bijelo LED
	Kut skeniranja	Rotacija 360°, nagib ±60°, skošenje ±60°
	Minimalni kontrast	25%
	Brzina skeniranja	500 puta/s
	Uobičajena dubina polja skeniranja (DOF)	60-100 mm (4mil code39) 50-250 mm (13mil EAN13) 40-300 mm (20mil QR) 40-280 mm (10mil PDF417) Kvaliteta bar koda i uvjeti okoline mogu utjecati na performanse
Mehaničke i električne karakteristike	Sučelje	USB/USB COM,RS232 (žično) Bluetooth,2.4GHz RF bežično
	Bluetooth	HID SPP BLE
	Radni napon	Istosmjerni 5 V
	Jakost struje	200 mA (u radu) 10mA (u mirovanju)
	Baterija	Litijska baterija 2200 mAh, traje 3-7dana, trajanje punjenja 4-5 h
	Veličina memorije	8K znakova/bar kodova ≤128
	Dimenzije	170*65*100 mm (skener) 120*95*65 mm (podnožje za punjenje)
	Težina	400 g
Dužina kabela	1.5 M	
Indikatori	Zujalo i LED	
Uvjeti okoline	Radna temperatura	-20~60°C
	Temperatura za skladištenje	-40~85°C
	Vlaga	5%-95% (bez kondenzacije)
	Neosjetljivost na svjetlo	0~100,000 Lux
	Razina IP zaštite	IP52
	Izdrži pad s visine od	1.5 m

CENTRALNI SERVIS:

Microline d.o.o.
www.microline.hr
micropos@microline.hr

PRODAJNI PREDSTAVNIK:

MicroPOS

