



MicroPOS

LK-P58

Mobilni termalni printer

- Upozorenje "Nema papira"
- Podržava ispis pohranjenog logotipa (NV)
- Funkcija za štednju energije
- Podržava Bluetooth dual mode
- Podržava ispis više kodova 1D&2D
- Kompatibilan sa sustavima Windows/IOS/Android



Skladište




Bolnica



Kafić



Logistika

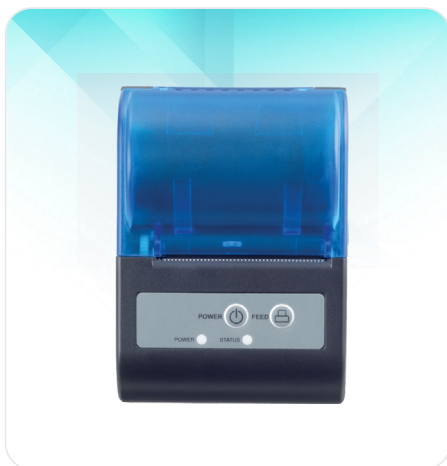

Windows 7



Windows 8



Windows 10



CCC



www.micropos.biz



LK-P58

Mobilni termalni printer



Ispis	MicroPOS LK-P58
Način ispisa	Izravni termalni
Širina papira	58 mm F 40 mm
Širina ispisa	48 mm
Prored	3.75 mm (prilagodljivo naredbama)
Veličina stupca	384 točke/liniji
Brzina ispisa	70 mm/s
Sučelje	USB+Bluetooth / USB+Wifi / USB+Wifi+Bluetooth
Veličina znakova	ANK, Font A: 1.5x3.0 mm (12x24 točke) Font B: 1.1x2.1 mm (9x17 točaka) pojednostavljeni/tradicionalni kineski: 3.0x3.0 mm (24x24 točke)
Znakovi bar koda	
Prošireni skup znakova	PC347(standardni europski)/Katakana/PC850(višejezični)/ PC860(portugalski)/ PC863(kanadski francuski)/PC865(nordijski)/ zapadno europski/grčki/ hebrejski/ istočno europski/iranski/WPC1252/ PC866(ćirilica#2)/PC852(Latin2)/PC858/ iranski II/latvijski/arapski/ PT151(1251)
Vrsta bar koda	1D:UPC-A/UPC-E/JAN13 (EAN13) /JAN8 (EANS)/ CODE39/ITF/CODABAR/CODE93/CODE128 2D:QR CODE/PDF417
Međuspremnik	
Ulazni	32 Kb
NV flash memorija	64 Kb
Napajanje	
Adapter za napajanje	Izlaz: istosmjerno 9 V/2 A
Ulaz pisača	DC 9V/2A
Baterija	7.4 V/2000 mAh
Fizičke karakteristike	
Težina	0.215 kg
Dimenzije	107*76*50 mm (D*Š*V)
Uvjeti okruženja	
Radno okruženje	0~45°C, 10~80% relativne vlage
Okruženje za skladištenje	-10~60°C, 10~90% relativne vlage (bez kondenzacije)
Pouzdanost	
Trajanje glave za ispis	50 km
Upravljački program	Windows/Linux/Android/Mac

CENTRALNI SERVIS:

Microline d.o.o.
www.microline.hr
micropos@microline.hr

PRODAJNI PREDSTAVNIK:

MicroPOS

