

PISAČ POS



MicroPOS

WTP-100 II

- Sukladno programu energetske učinkovitosti Energy Star
- Velika brzina ispisa: 300 mm/s
- Širina papira 50~82.5 mm
- Sukladan s naredbama ESC/POS
- Upravljački programi: Windows Driver(2012, 8, 7, 2008, VISTA, 2003, XP, 3 2bit & 64bit), Windows CE & Mobile Driver & SDK(CE 4.2 ~, Mobile 5.0 ~), Linux Driver, Mac Driver, OPOS Driver, JavaPOS Driver, iOS SDK, Android(2.1 ~) SDK, Windows SDK




Primjena



MicroPOS

STOLNI TERMO PISAČ POS, JEDNOSTAVNO ULAGANJE PAPIRA

WTP-100 II

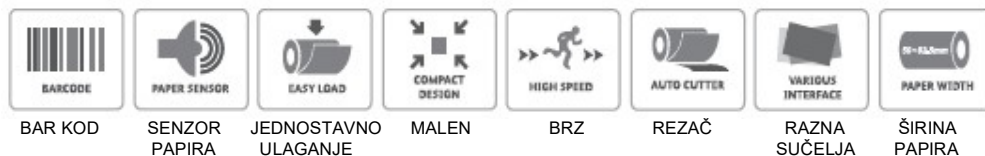

BAR KOD

SENZOR PAPIRA

JEDNOSTAVNO ULAGANJE

MALEN

BRZ

REZAČ

RAZNA SUČELJA

ŠIRINA PAPIRA



ISPIS	NAČIN	Termo
	BRZINA	Maks. 300 mm/s
	ŠIRINA	72 mm (512 točaka/redak)
	REZOLUCIJA	180 DPI
PAPIR	VRSTA	Termo papir
	ŠIRINA	50 mm ~ 82.5 mm
	DEBLJINA	0.06 mm ~ 0.09 mm
	DIA ROLE	Maks. ø 80.0 mm
	UNUTARNJI DIA ROLE	12.5 mm ± 0.5 mm
POUZDANOST	TERMO GLAVA	160 km
	PROSJEČNO	60,000,000 redaka
AUTOMATSKI REZAČ		1,500,000 rezova (giljotina)
SENZOR	STANDARDNO	Kraj papira, papir, papir na izmaku, poklopac otvoren
	IZBORNO	Crna oznaka
SUČELJE		USB (B type) plus jedna dodatna kartica po izboru (serijska, paralelna, Wi-Fi, Ethernet, Bluetooth(iOS))
EMULACIJA		Sukladno naredbama ESC/POS
UPRAVLJAČKI PROGRAM		Windows Driver (2012, 8, 7, 2008, VISTA, 2003, XP, 32bit & 64bit), Windows CE & Mobile Driver & SDK (CE 4.2 ~, Mobile 5.0 ~), Linux Driver, Mac Driver, OPOS Driver, JavaPOS Driver, iOS SDK, Android (2.1 ~) SDK, Windows SDK
NAPAJANJE	VRSTA	External SMPS
	IZMJENIČNO	100 ~ 240 V izmjenično 50/60 Hz
	ISTOSMJERNO	24 V istosmjerno / 1.75A
TEMPERATURA	RAD	5 ~ 40°C
	SKLADIŠTENJE	-20 ~ 60°C
DIMENZIJE		156 x 203 x 155 mm (Š x D x V)
TEŽINA		1.7 kg
BOJA		Siva, boja slonovače

SUČELJE



PRIBOR



Melody Box

- Specifikacije i dizajn podložni izmjenama bez najave.

CENTRALNI SERVIS:

Puntijar d.o.o.
www.puntijar.hr
micropos@puntijar.hr

PRODAJNI PREDSTAVNIK

MicroPOS

